

ALL DUCTS SHALL BE CENTERED WITHIN RECTANGULAR AREA.

GROUND ROD


NOTES:


1. PROVIDE PROTECTIVE BUSHINGS ON ALL CONDUITS.

2. FOUNDATION TOP SHALL HAVE SQUARED EDGES.

3. ALL FOUNDATION LOCATIONS SHALL BE DETERMINED IN FIELD BY TRAFFIC DIVISION AT TIME OF CONSTRUCTION.

4. CABINET ANCHORS ARE HILTI KWIK BOLT II WEDGE ANCHORS OR EQUAL 4 PER CABINET, 1/2" X 4 1/2" STAINLESS STEEL (#304) FULL THREADED.

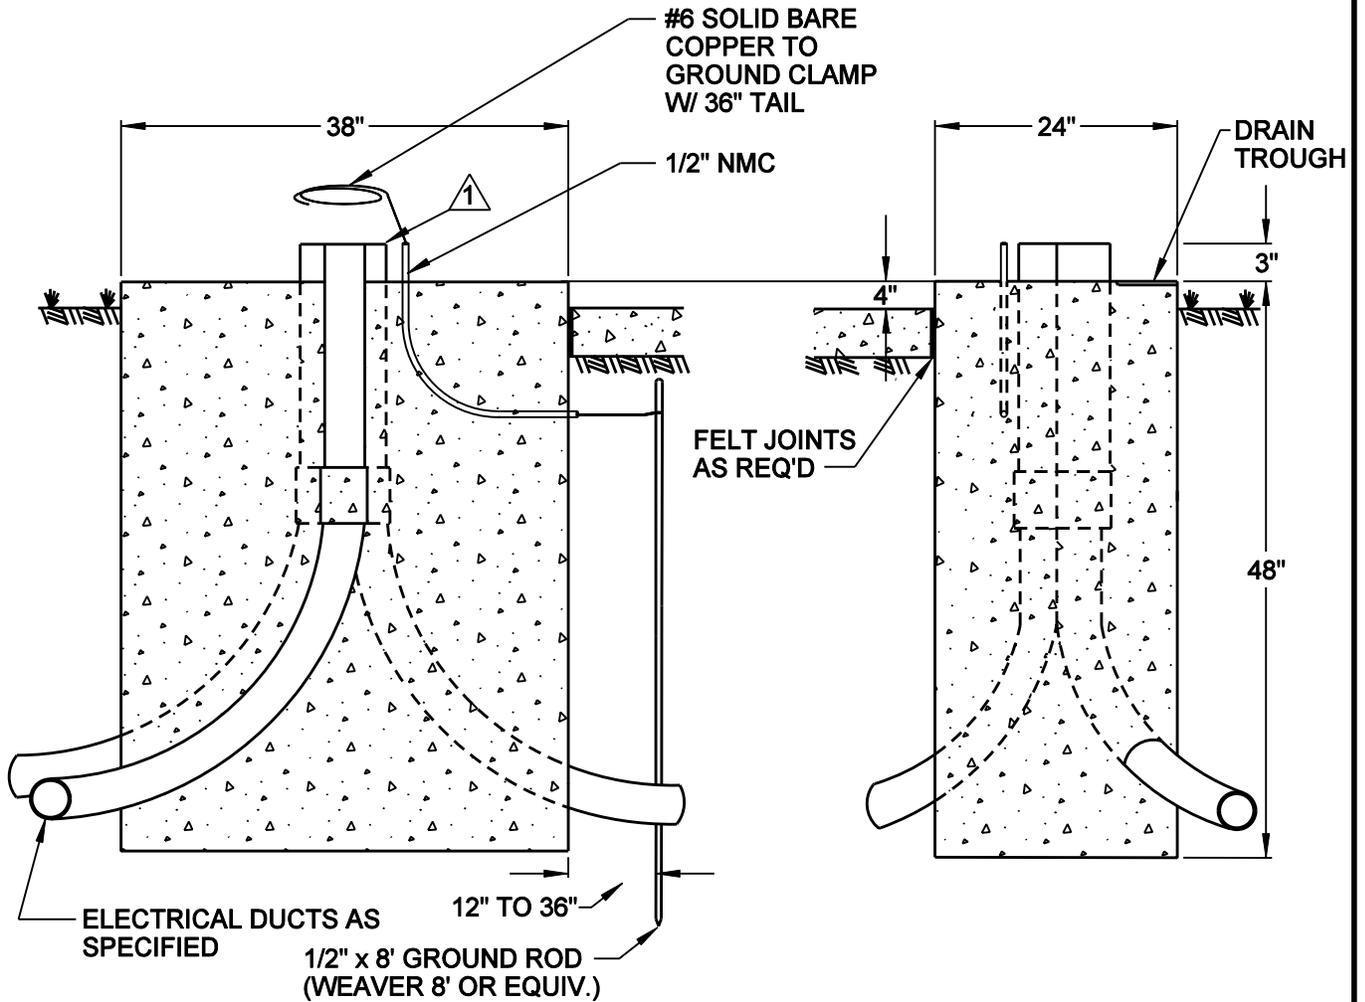

	MINNEAPOLIS DEPARTMENT OF PUBLIC WORKS		FOUNDATION - SIGNAL FIBER HUB CABINET	STANDARD PLATE NO. TRAF-1088
	DRAWN: CLK	DATE: 11/30/11		
	APPROVED: DRP	DATE: 11/30/11		