


PRIMARY SIGNAL HEADS

NOTE:

1. ALL HEAD WIRES SHALL BE TERMINATED ON TERMINAL BLOCK FOR THROUGH MOVEMENTS AND PEDS
2. *SIGNAL HEAD WIRING SHALL PROVIDE 1-SPARE WIRE.
3. ● WIRE NUT SPLICE
4. MASTARM HEAD WIRING SHALL BE 7 CONDUCTOR CABLE.

SIGNAL & PED HEAD WIRES-1/C #14 XHHW-2 QTY & QUALITY AS SPECIFIED. TAPE TOGETHER AS DIRECTED BY THE ENGINEER.

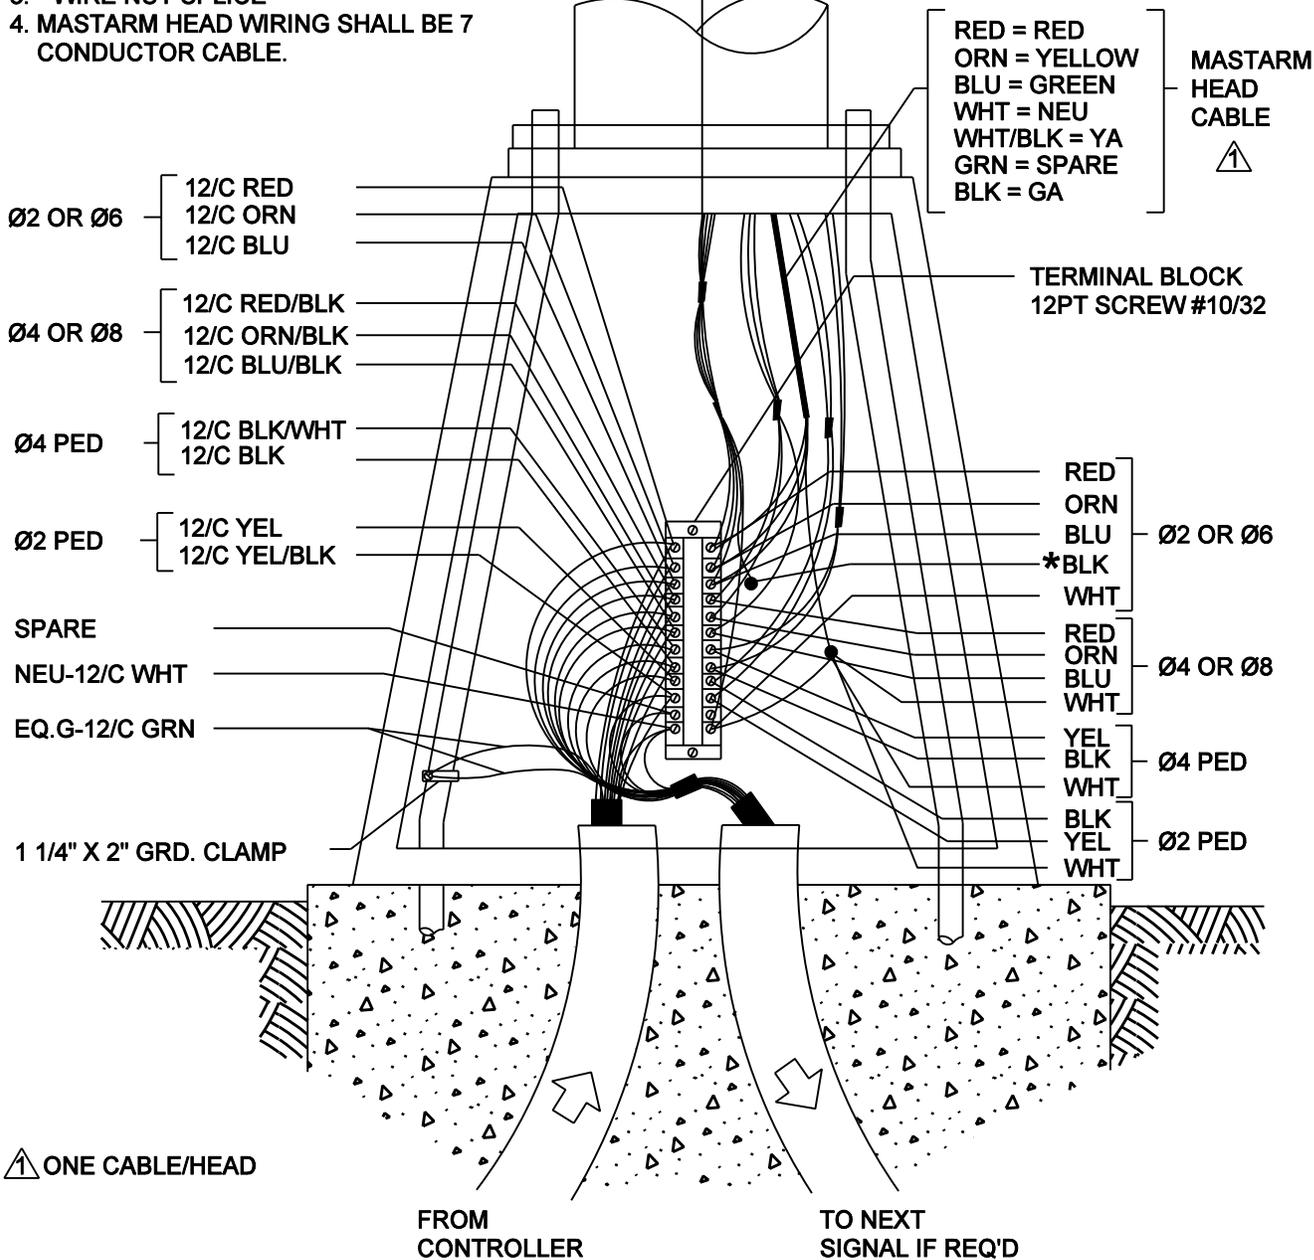

NO SCALE

	MINNEAPOLIS DEPARTMENT OF PUBLIC WORKS		WIRING - SIGNAL MASTARM EVEN PHASES	STANDARD PLATE NO. TRAF-1560-R1
	DRAWN: CLK	DATE: 1/2/11		
	APPROVED: DRP	DATE: 1/2/11		