


#3 REBAR STIRRUPS

ANCHOR RODS ON 11" BOLT CIRCLE AT TOP

3/8" WELDED, STRAIGHT LINK GRADE 80 ALLOY CHAIN

NOTES:

1. BOLT MATERIAL- 36000 PSI MIN. YIELD ROD PER ASTM A36.
2. FINISH-HOT DIP GALVANIZED PER ASTM A153,NUTS TO RUN FREE AFTER PLATING.
3. THREAD TO BE CLASS 2A PER AMERICAN STD. B 1.1 AFTER GALVANIZING.
4. ALL BOLTS CUT THREAD.
5. 2 GALVANIZED HEAVY HEX NUT PER ASTM A194 GR. 2H. ASSEMBLED AFTER ROD PLATING.

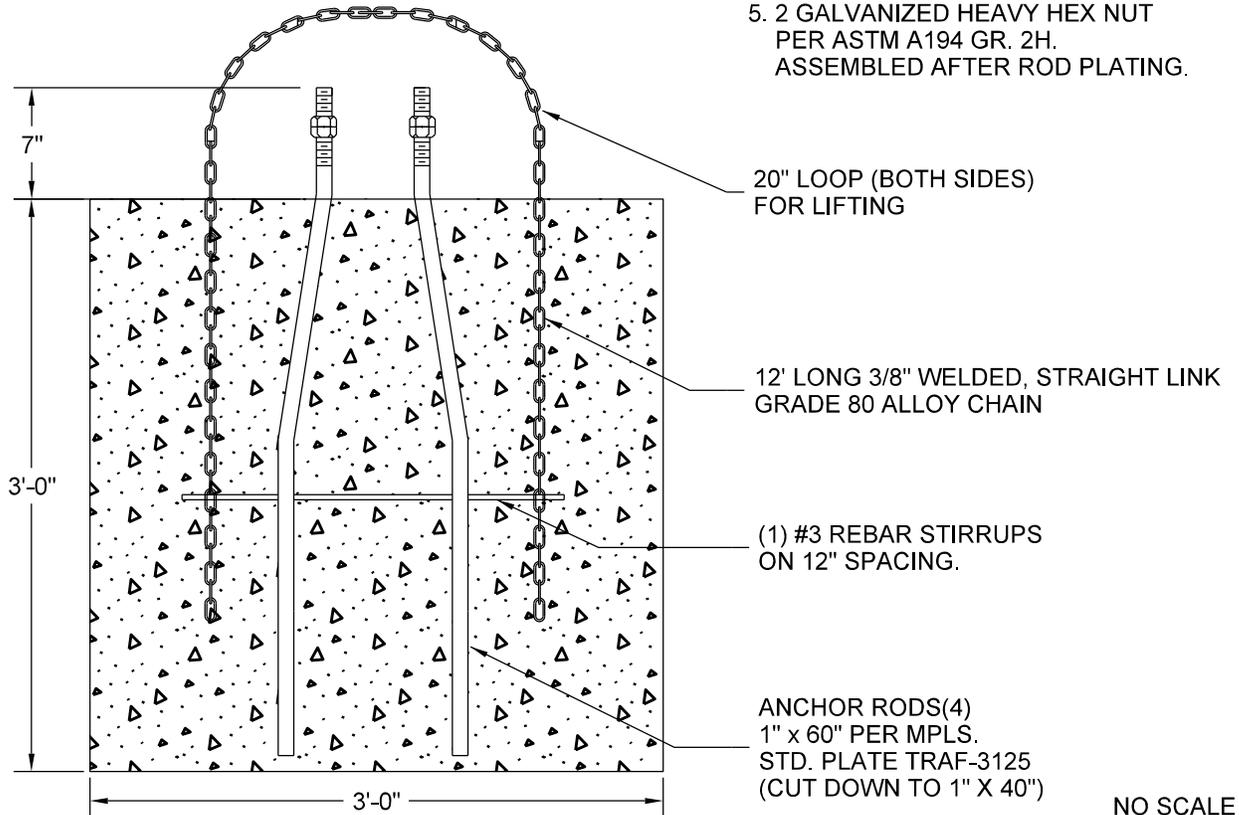

20" LOOP (BOTH SIDES) FOR LIFTING

12' LONG 3/8" WELDED, STRAIGHT LINK GRADE 80 ALLOY CHAIN

(1) #3 REBAR STIRRUPS ON 12" SPACING.

ANCHOR RODS(4)
1" x 60" PER MPLS.
STD. PLATE TRAF-3125
(CUT DOWN TO 1" X 40")

NO SCALE



MINNEAPOLIS
DEPARTMENT OF PUBLIC WORKS

DRAWN: CLK

DATE: 3/25/14

APPROVED: DRP

DATE: 3/25/14

FOUNDATION - ST. LIGHT

30' - PORTABLE

REFERENCE PLATE: TRAF-3125

STANDARD
PLATE
NO.
TRAF-3068-R1