



SLOPES FLATTER THAN 1:2
(1.2 STAPLES PER SQ. YD.)

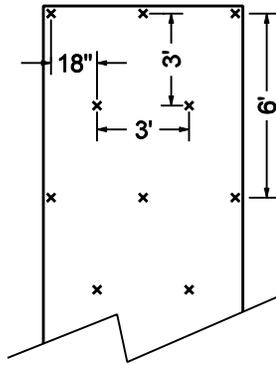


STANDARD 6' BLANKET

SLOPES 1:2 TO 1:1
(1.7 STAPLES PER SQ. YD.)

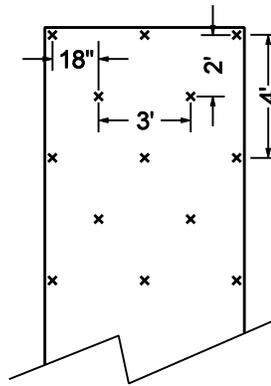


STANDARD 6' BLANKET

CHANNEL AND DITCH APPLICATIONS
(3.5 STAPLES PER SQ. YD.)

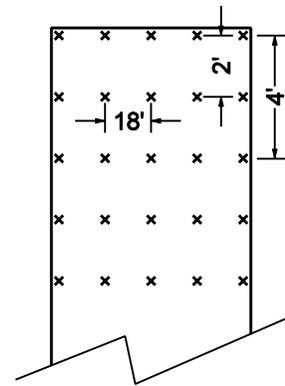


STANDARD 6' BLANKET

SLOPES FLATTER THAN 1:2
(1.2 STAPLES PER SQ. YD.)

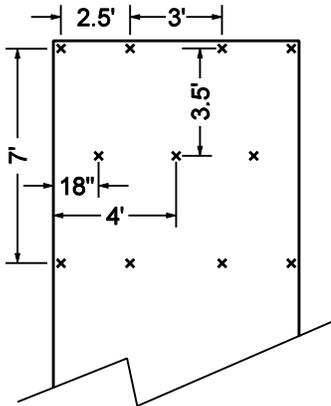


STANDARD 8' BLANKET

SLOPES 1:2 TO 1:1
(1.4 STAPLES PER SQ. YD.)

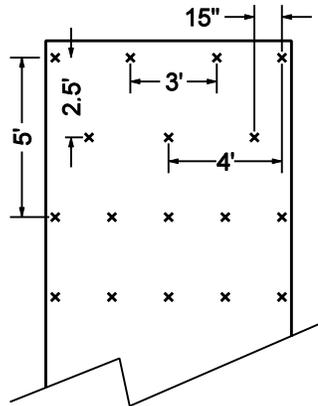


STANDARD 8' BLANKET
BLANKET STAPLING PATTERN

CHANNEL AND DITCH APPLICATIONS
(3.5 STAPLES PER SQ. YD.)

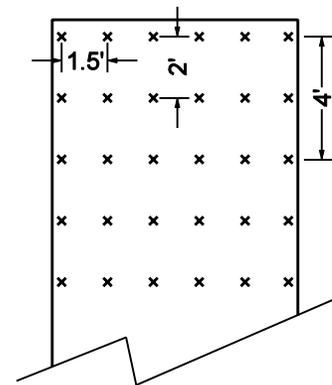

STANDARD 8' BLANKET

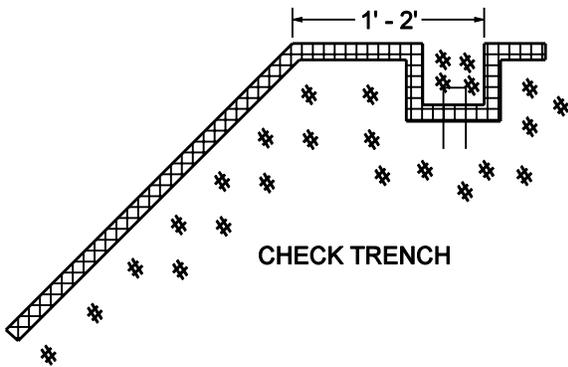

CHECK TRENCH

BLANKET TYPES

CATEGORY	APPLICATION	USE
0 - 1	6 - 8 WEEKS	FLAT AREAS, LAWNS, MOWED AREAS
2	ONE SEASON	SLOPES 1V:3H TO 1V:2H LESS THAN 50' LENGTH
3	ONE SEASON	SLOPES 1V:3H TO 1V:2H MORE THAN 50' LENGTH
4	SEMI-PERMANENT	SLOPES 1V:2H AND STEEPER, 4% OR LESS GRADIENTS
5	SEMI-PERMANENT	DITCH BOTTOMS, 5% AND LESS GRADIENT
6 - 7	PERMANENT	DITCH BOTTOMS, 6% OR 7% AND LESS GRADIENT

CATEGORY	ACCEPTABLE TYPES
0	WOOD FIBER 0S, RD
1	STRAW RD 1S, WOOD FIBER RD 1S
2	STRAW 1S, WOOD FIBER 1S
3	STRAW 2S, WOOD FIBER 2S
4	STRAW/COCONUT 2S, WOOD FIBER HV 2S
5	STRAW/COCONUT 2S
6	STRAW/COCONUT 3S, WOOD FIBER 3S
7	COCONUT 3S, WOOD FIBER 3S

0S - NO NETTING, STITCHING ONLY
 1S - NETTING ON 1 SIDE
 2S - NETTING ON 2 SIDES
 3S - MORE THAN 2 NETTINGS
 FORMING A 3D MATRIX
 HV - HIGH VELOCITY
 RD - RAPIDLY DEGRADABLE
 NETTING/STITCHING

INSTALLATION NOTES:

1. DIG 6" X 6" TRENCH
2. LAY BLANKET END INTO TRENCH
3. STAPLE BLANKET IN BOTTOM OF TRENCH EVERY 18".
4. BACKFILL TRENCH WITH SOIL AND COMPACT.

MINNEAPOLIS CUSTOM
 MNDOT SPEC. REF. 3885
 NOT TO SCALE



MINNEAPOLIS
 DEPARTMENT OF PUBLIC WORKS

DRAWN: DCD

DATE: 4/06

APPROVED: HRS

DATE: 4/07

BLANKET STAPLING PATTERN

STANDARD
 PLATE
 NO.
 SEWR-8005