


PRIMARY SIGNAL HEADS

NOTE:

1. ALL HEAD WIRES SHALL BE TERMINATED ON TERMINAL BLOCK FOR THROUGH MOVEMENTS AND PEDS
2. *SIGNAL HEAD WIRING SHALL PROVIDE 1-SPARE WIRE.
3. ● WIRE NUT SPLICE
4. MASTARM HEAD WIRING SHALL BE 7 CONDUCTOR CABLE.

SIGNAL & PED HEAD WIRES-1/C #14 XHHW-2 QTY & QUALITY AS SPECIFIED. TAPE TOGETHER AS DIRECTED BY THE ENGINEER.

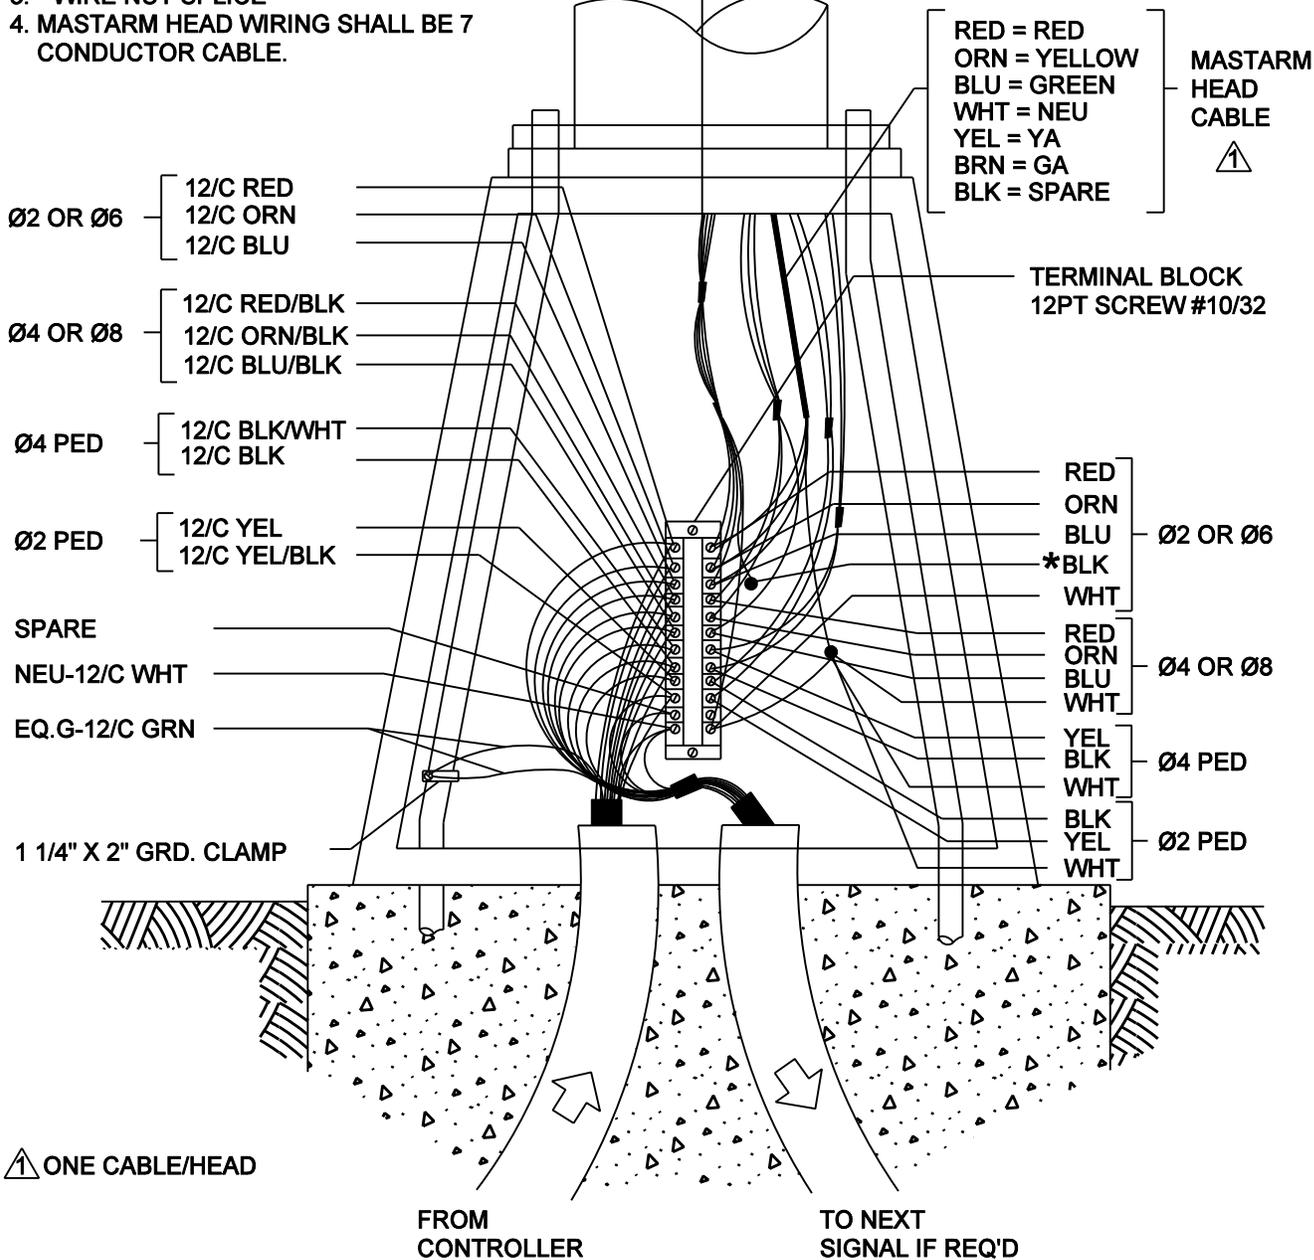

NO SCALE

	<p>MINNEAPOLIS DEPARTMENT OF PUBLIC WORKS</p>		<p>WIRING - SIGNAL MASTARM EVEN PHASES</p>	<p>STANDARD PLATE NO. TRAF-1560</p>
	<p>DRAWN: LPK</p>	<p>DATE: 1/1/11</p>		
	<p>APPROVED: DRP</p>	<p>DATE: 1/1/11</p>		