



AECOM
800 LaSalle Avenue, Suite 500
Minneapolis, MN 55402
612 376 2000 Tel
612 376 2271 Fax

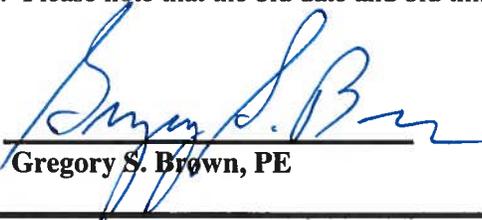
ADDENDUM NO. 2

Project: 7TH STREET NORTH RECONSTRUCTION PROJECT
City of Minneapolis Project L.P. 600D 9952
OP #8277

Date: April 15, 2016

Bids Due: 10:00 AM, Tuesday, April 19, 2016 (NO CHANGE)

The following additions, revisions, corrections, and clarifications contained herein shall become part of the Contract Documents for the Project, and shall be included in the Scope of Work and Bid Proposals to be submitted. References made below to Specifications and Contract Drawings shall be used as a general guide only. Bidders shall determine for themselves the full scope of work affected by the Addendum items. Acknowledge receipt of this addendum on the owner/contractor contract. Failure to do so may subject bidder to disqualification. Please note that the bid date and bid time are unchanged.

Approved By: 
Gregory S. Brown, PE

I. CLARIFICATIONS TO QUESTIONS

Question: Does the \$8.50 price for aggregate base include taxes?

Answer: The \$8.50 fee includes all applicable charges; no additional charges/costs should be anticipated for aggregate base material purchase.

Question: Are Contractors allowed to use aggregate base from other sources than the City source listed in the special provisions?

Answer: No, Contractors shall only acquire aggregate base material as outlined in the special provisions.

Question: Are Contractors required to saw and seal bituminous pavement?

Answer: Yes, Contractors shall sawcut and seal bituminous pavement in accordance with the detail on Sheet D1. Sawcutting between intersections to be approximately 50 foot spacing. All labor, equipment and material required to sawcut and seal bituminous pavement shall be considered incidental to bituminous paving pay items.

Question: When does Stage 4 work occur?

Answer: The Contractor may complete Stage 4 work items following completion of Stage 2A. Timing of Stage 4 work shall be coordinated with Target Center project, stages 3A-3B and as directed by the Engineer.

END OF ADDENDUM NO. 2
