


9" CLAY PIPE CATCH BASIN STAND PIPE FOR EROSION CONTROL

MINIMUM STAND PIPE HEIGHT LEVEL TO THE TOP OF THE CONCRETE STRUCTURE,
 MAXIMUM HEIGHT OF STAND PIPE IS 2" BELOW BOTTOM OF CB GRATE

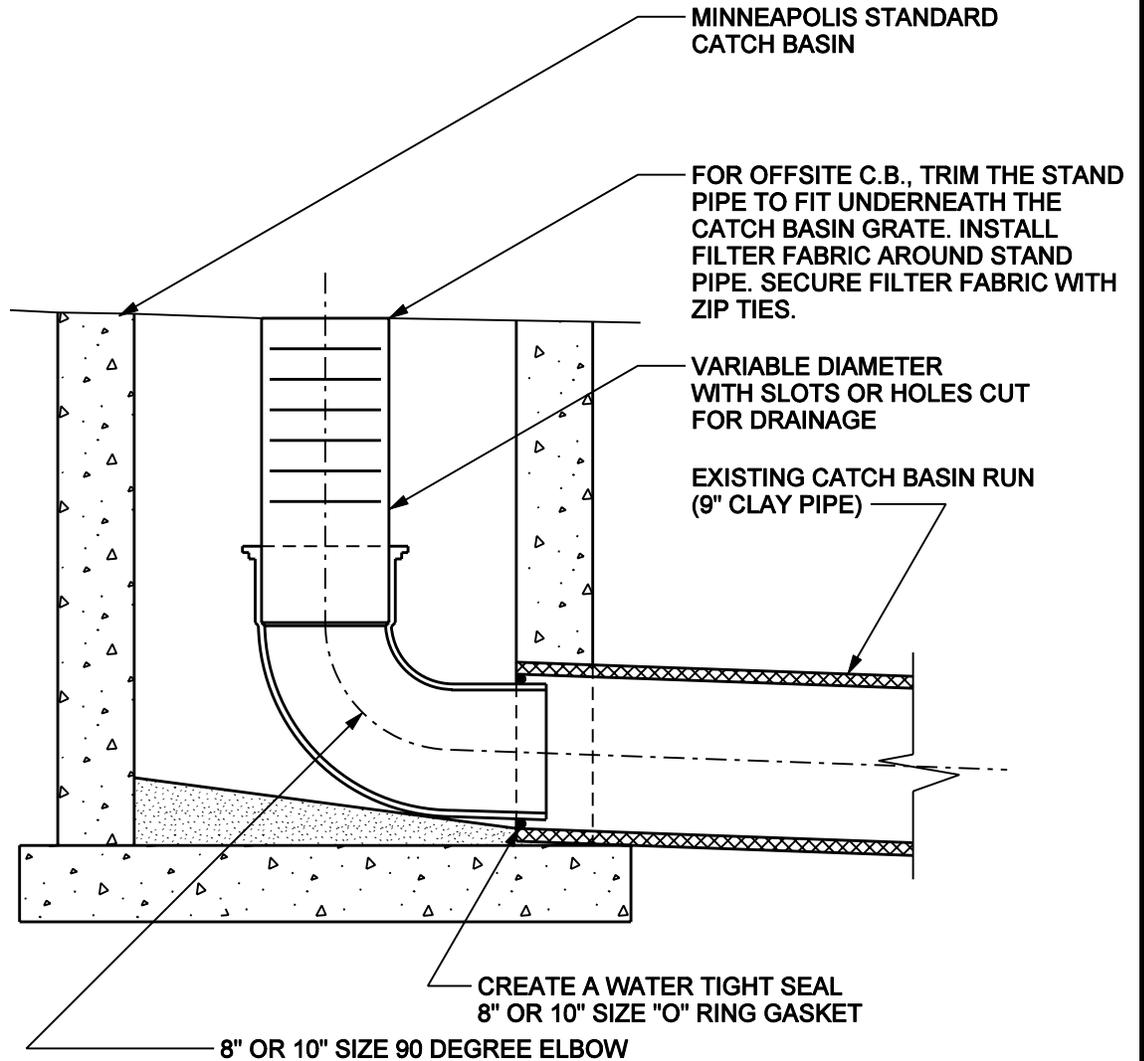

EMERGENCY MOBILIZATION MAY BE REQUIRED TO PREVENT LOCALIZED FLOODING DURING RAIN EVENTS TO IMPROVE FLOW RATE INSTALL A WRAP OF CHICKEN WIRE BETWEEN STAND PIPE AND GEOTEXTILE FABRIC DO NOT COVER TOP OF STAND PIPE WITH GEOTEXTILE FABRIC, THIS IS THE EMERGENCY OVERFLOW

NOTES:
 WHERE C.B.'S ARE PAIRED, INSTALL EROSION CONTROL STAND PIPES ON DOWNSTREAM C.B., COVER UPSTREAM C.B.
 INSPECT WEEKLY AND/OR AFTER EACH 1/2" RAINFALL, CLEAN WHEN 1/3 FULL OR AS NECESSARY

USE HI-FLOW FILTER FABRIC, 200 GAL. PER MINUTE / SQ. FT.

MINNEAPOLIS CUSTOM
 MNDOT SPEC. REF. 3891
 NOT TO SCALE

	MINNEAPOLIS DEPARTMENT OF PUBLIC WORKS		SEDIMENT CONTROL CATCH BASIN STAND PIPE	STANDARD PLATE NO. SEWR-8000
	DRAWN: DCD	DATE: 3/07		
	APPROVED: HRS	DATE: 3/07		